


Walraven Twinlok® Test Plug

(P1605)

temperature, pressure and flow measurements

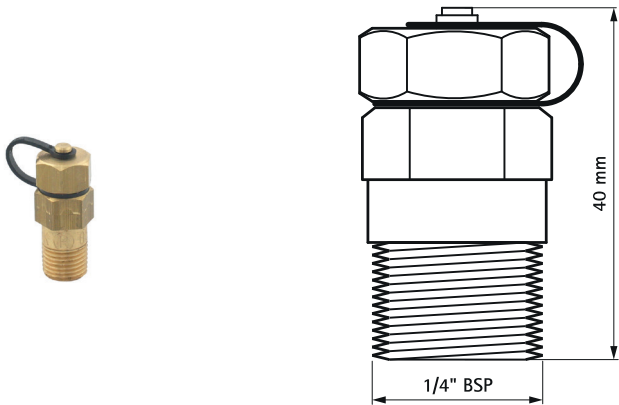

Features & benefits

- for temperature, pressure and flow measurements
- 1/4" BSPT Thread
- max. pressure 500 P.S.I. (35 bar)
- EPDM core
- max. temperature 135 °C

Product Number	Material	Max. operating pressure at 20 °C	Total Width x Total Height x Total Depth
Reference letter			W x H x DtT
Reference letter		(bar)	(mm) x (mm) x (mm)
0634000	Brass	35	15 x 15 x 40.50
0634001	Brass	35	25 x 15 x 79
0634009	Stainless Steel	35	15 x 15 x 40.50
0634533	Brass	35	63 x 75 x 63