


Walraven Twinlok® Test Plug

(P1605)

temperature, pressure and flow measurements

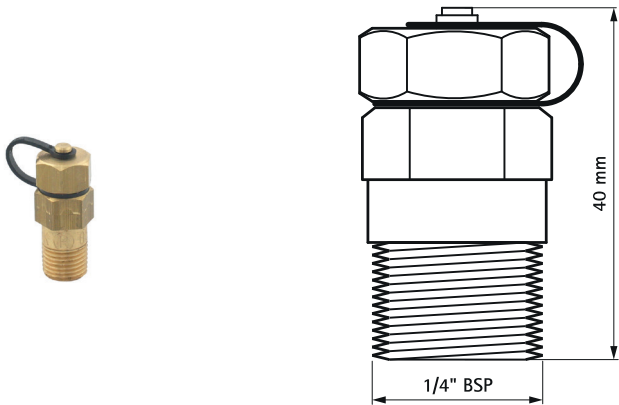

Features & benefits

- for temperature, pressure and flow measurements
- 1/4" BSPT Thread
- max. pressure 500 P.S.I. (35 bar)
- EPDM core
- max. temperature 135 °C

Product Number	Nominal Diameter Connection	Material	Max. operating pressure at 20 °C	Total Width x Total Height x Total Depth
Reference letter	NDC			W x H x D t T
Unit description			bar	mm x mm x mm
0634000	1/4"	Brass	35	15 x 15 x 40.5
0634001	1/4"	Brass	35	25 x 15 x 79
0634009	1/4"	Stainless Steel	35	15 x 15 x 40.5
0634533	1/4"	Brass	35	63 x 75 x 63