


Walraven Pacifyre® AWM III Fire Collar

(U0435)

Standard collar with low collar height for plastic pipes

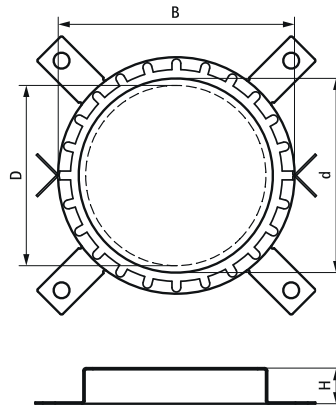

Features & benefits

- Two-part fire collar designed for easy installation
- Zero distance is possible between fire collars
- With a fire resistance up to EI 120 U/C
- Low collar height, allowing building of bends, sockets and T-joints close to the wall or ceiling
- Should be fixed on both sides of the wall / ceiling
- Tested according to EN 1366-3



Product Number	Outside Pipe Diameter	Inner Diameter	Outer Diameter	Total Width x Total Height x Number Of Fixations Needed Total Depth	
Reference letter	D	ID	OD	W x H x DtT	
Unit description	(mm)	(mm)	(mm)	(mm) x (mm) x (mm)	
2135032034	32	38	47	26 x 87 x 87	2
2135040042	40	46	55	26 x 95 x 95	2
2135050052	50	56	65	26 x 105 x 105	2
2135063065	63	69	82	26 x 122 x 122	4
2135075077	75	81	94	26 x 134 x 134	4
2135090092	90	86	114	26 x 154 x 154	4
2135110112	110	116	134	26 x 174 x 174	4
2135125125	125	132	150	150 x 40 x 150	4
2135140140	140	144	168	168 x 40 x 168	4
2135160160	160	164	188	188 x 40 x 188	4
2135180180	180	184	218	218 x 40 x 218	4