


Walraven Pacifyre® MLAR Strip

(U0445)

For use according to MLAR/LAR/RbALi, Section 4.2 or 4.3 "Erleichterungen"

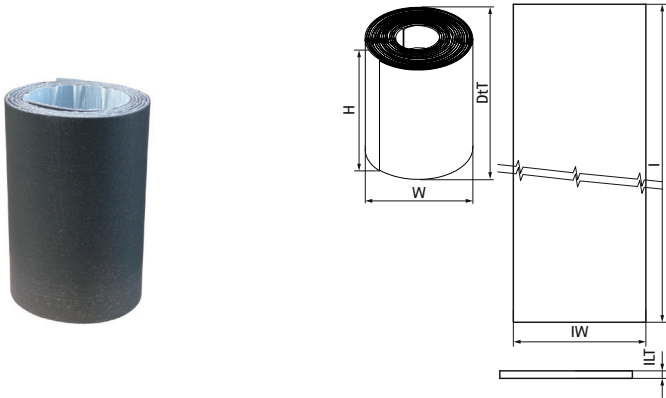

Features & benefits

- For sealing pipe and cable penetrations in walls and ceilings
- Installation of connectors for cast iron pipes in walls and ceilings possible
- Many partitions with just one role
- Non-combustible pipes up to a maximum pipe outside diameter of 160 mm
- Combustible pipes up to a maximum pipe outside diameter of 32 mm
- According to MLAR/LAR/RbALi, Section 4.2 or 4.3 "Reliefs"
- Self-adhesive over the entire length
- Suitable for use in damp rooms
- Quick, uncomplicated and space-saving assembly
- External monitoring by MPA Braunschweig
- Thanks to the width of 250 mm, insulation of all common ceiling thicknesses is possible

Product Number	Length	Intumescent Width	Intumescent Layer Thickness	Total Width x Total Height x Total Depth
Reference letter	I	IW	ILT	W x H x DtT
Unit description	(mm)	(mm)	(mm)	(mm) x (mm) x (mm)
2136250025	2500	250	3	250 x 3 x 2500