

WUP Uni Plug

Standard universal anchor for all types of substrates

Anchor Types



WUP 6x30
WUP 8x40
WUP 10x50
WUP 12x60

Features and Benefits

- High load capacity
- Can be used with wood screws and chipboard screws
- Suitable for variety of substrates
- Easily slides into holes
- Does not slip past collar in deep holes
- Does not expand prematurely
- Resists rotation within holes
- Material: high quality PA6 polyamide

Suitable base materials

- Concrete
- Masonry
- Lightweight concrete
- Sand-lime bricks
- Natural stone
- Gypsum
- Hollow masonry
- Rock

Typical Applications

- Shelves
- Wall-mounted cabinets
- Sanitary fixings
- HVAC and plumbing fixings



Product Details


Article	Description	Diameter	Length
		d [mm]	L [mm]
61007206	WUP 6x30	6	30
61007208	WUP 8x40	8	40
61007210	WUP 10x50	10	50
61007212	WUP 12x60	12	60

Packaging Details


Article	Description	Pack 1		Pack 2	
		[pcs]	EAN13	[pcs]	EAN13
61007206	WUP 6x30	500	8719942071406	6000	8719942071888
61007208	WUP 8x40	300	8719942071420	3600	8719942071895
61007210	WUP 10x50	150	8719942071444	1800	8719942071901
61007212	WUP 12x60	100	8719942071468	1200	8719942071918

Setting Details

Anchor Size			6x30	8x40	10x50	12x60
Length	L	[mm]	30	40	50	60
Drill hole diameter	d_o	[mm]	6	8	10	12
Drill hole depth	h_o	[mm]	40	50	70	80
Nominal anchorage depth	h_{nom}	[mm]	30	40	50	60
Screw diameter wood/ chipboard	d_s	[mm]	3.5-5	4.5-6	6-8	8-10
Min. screwing depth	$l_{s,min}$	[mm]	34	44	54	64
Max. fixture thickness	$t_{fix,max}$	[mm]	based on screw length			

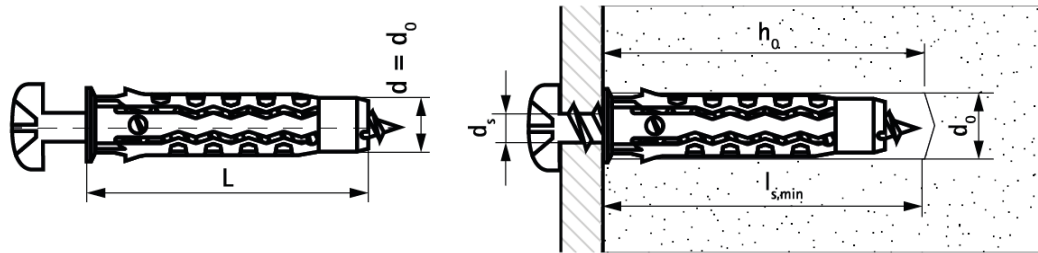

Installation Instructions

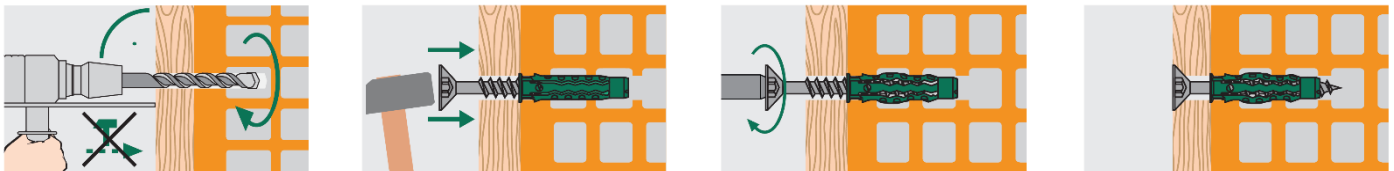

Loading Data

Loading data is presented for single anchors installed with maximum diameter wood screw.

Characteristic loads

Anchor Size			6x30	8x40	10x50	12x60
C20/25 Concrete	N_{rk}	[kN]	2.25	5.75	9.50	13.50
Brick	N_{rk}	[kN]	4.50	5.00	5.50	7.50
Lightweight concrete	N_{rk}	[kN]	0.60	0.95	1.50	2.00
Perforated brick	N_{rk}	[kN]	1.00	2.00	2.25	2.50
Sandstone	N_{rk}	[kN]	3.50	5.00	9.00	10.50

Recommended loads

Anchor Size			6x30	8x40	10x50	12x60
C20/25 Concrete	N_{rec}	[kN]	0.45	1.15	1.90	2.70
Brick	N_{rec}	[kN]	0.90	1.00	1.10	1.50
Lightweight concrete	N_{rec}	[kN]	0.12	0.19	0.30	0.40
Perforated brick	N_{rec}	[kN]	0.20	0.40	0.45	0.50
Sandstone	N_{rec}	[kN]	0.70	1.00	1.80	2.10

Given recommended tension loads include a safety factor of 5.