


Walraven RapidStrut® Connector 90° Rigid


Technical Data Sheet

All tests with rails type L (1.5 mm thickness) are made according RAL-GZ 655 guideline.
All tests were made by using Walraven Slide Nuts M12 (Part No. 65188012), Walraven Bolts M12 x 30 mm (Part No. 61481230) and Walraven Washers 24 x 2.5 mm (Part No. 65381312).
Fasteners were tightened with installation torque (T) of 30 Nm (when tested with rails type L) or 60 Nm (when tested with rails type H).

Walraven RapidStrut® Connector 90° Rigid (BUP1000)

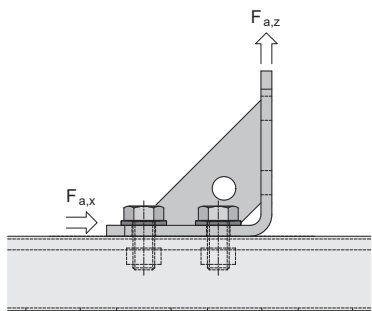

#66588291



On rail type	T (Nm)	Fa,x (N)	Fa,z (N)
L (1.5 mm)	30	3,000	4,000
H (2.5 mm)	60	7,000	8,000

Find out how we can support you

Would you like to find out more about any of the solutions described in this Technical Data Sheet?
Or would you like to discuss how we could help you find the best possible solution for your project?
Get in touch today!

Technical Data Sheet Walraven RapidStrut® Connector 90° Rigid (EN) – TR190704 ; TR180702 ; - 11/2025 – PDF – Full content subject to modifications
* The technical data are non-binding and do not reflect the warranted characteristics of the products. They are subject to change. Please consult our General Terms and Conditions. Additional information is available upon request. It is the designer's responsibility to select products suitable for the intended purpose and to ensure that performance data are not exceeded. The installation instructions should always be read and followed.

United Kingdom Ireland

Walraven Ltd.
18 Wildmere Road
Banbury (GB)
Oxon, OX16 3JU
Tel. +44 1295 75 34 00
sales.uk@walraven.com

Walraven Group

Mijdrecht (NL) · Tienen (BE) · Bayreuth (DE) · Banbury (GB) · Malmö (SE) · Grenoble (FR) · Barcelona (ES)
Milan (IT) · Kraków (PL) · Mladá Boleslav (CZ) · Kyiv (UA) · Danville (US) · Dubai (AE) · Budapest (HU) · Mumbai (IN)
Singapore (SG) · Burlington (CA)