


Walraven RapidStrut®

Sistema de sujeción

Datos Técnicos

Placa de pared (articulada)

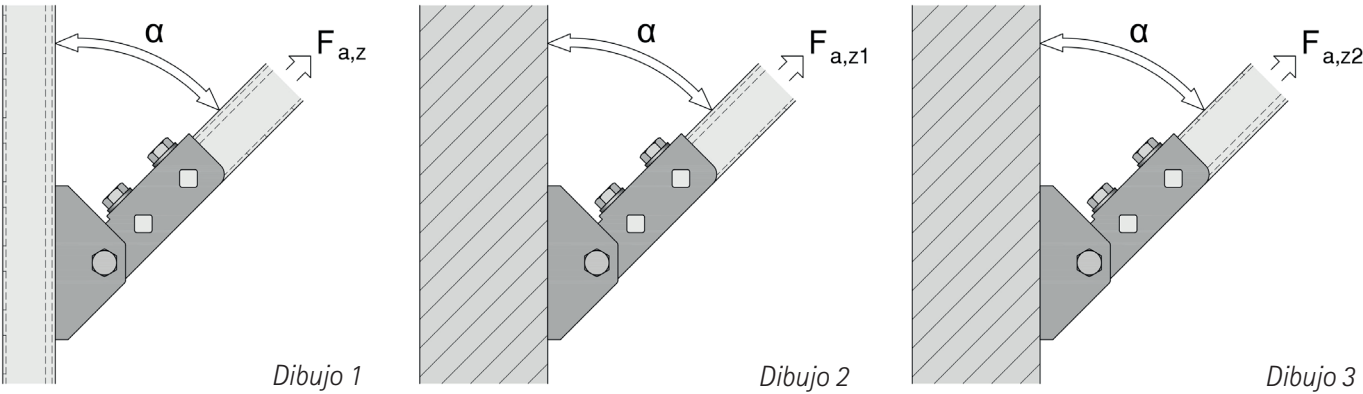

Datos Técnicos

Referencia	α°	$F_{a,z}$ (N) (Dibujo 1)	$F_{a,z1}$ (N) (Dibujo 2)	$F_{a,z2}$ (N) (Dibujo 3)	
66588814	0	2,800	3,975	9,700	
	30	2,900	3,975	9,700	
	45	2,500	3,975	9,700	
	60	2,400	3,975	9,700	
	90	3,400	3,975	9,700	
66587814	0	2,800	3,975	9,700	Acero inoxidable
	30	2,900	3,975	9,700	Acero inoxidable
	45	2,500	3,975	9,700	Acero inoxidable
	60	2,400	3,975	9,700	Acero inoxidable
	90	3,400	3,975	9,700	Acero inoxidable

Todos los valores probados con carriles 41x41x2,5mm.
 $F_{a,z}$ / $F_{a,z1}$ probado con Perno hexagonal M12 x 25 mm Gr 8.8 DIN 933 y Tuerca deslizante M12 651868012 a través del perfil abierto del carril, apretado a 40 Nm.
 $F_{a,z2}$ probado utilizando un perno hexagonal M12 x 25 mm Gr 8.8 DIN 933 a través de la sección ranurada del carril en la tuerca deslizante M12, apretada a 40 Nm.

		UK +44 1295 75 34 00	DE/AT/CH +49 921 75600	CZ/SK +420 326 724 009	UA +380 44 351 27 47
		NL +31 297 23 30 00	DK/NO +45 46 37 05 10	HU/RO +36 1 920 2458	SG +65 6970 0605
		BE +32 16 82 20 40	SE +46 40 36 54 20	HR +381 61 44 46 444	UAE +971 4 8821 114
		FR +33 4 76 04 10 70	PL +48 880 757 351	US +1 800 610 5056	Other countries
		ES +34 93 721 33 75	IT +34 93 721 33 75	CA +1 800-263-8652	+31 297 23 30 00