
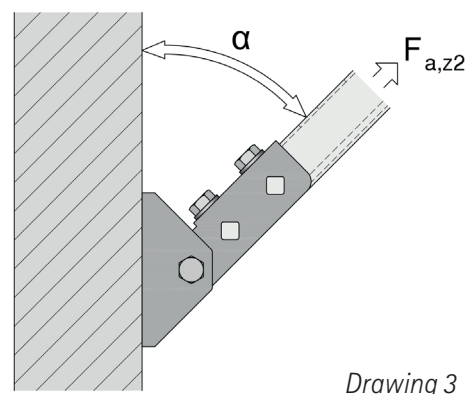
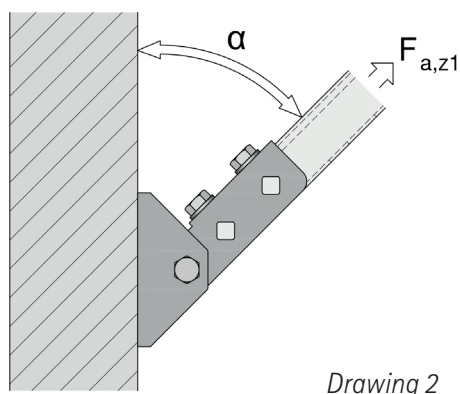


# Walraven RapidStrut® Support System

## Technical Data

### Wall Plates (Hinged)

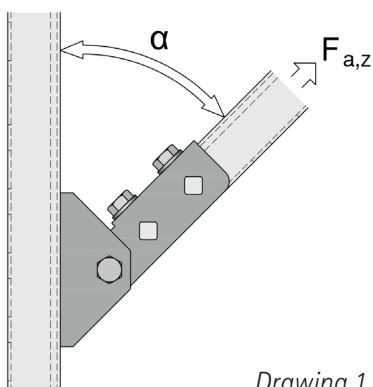

### Product details

| Part No. | $\alpha^\circ$ | $F_{a,z}$ (N)<br>(Drawing 1) | $F_{a,z1}$ (N)<br>(Drawing 2) | $F_{a,z2}$ (N)<br>(Drawing 3) |                 |
|----------|----------------|------------------------------|-------------------------------|-------------------------------|-----------------|
| 66588814 | 0              | 2,800                        | 3,975                         | 9,700                         |                 |
|          | 30             | 2,900                        | 3,975                         | 9,700                         |                 |
|          | 45             | 2,500                        | 3,975                         | 9,700                         |                 |
|          | 60             | 2,400                        | 3,975                         | 9,700                         |                 |
|          | 90             | 3,400                        | 3,975                         | 9,700                         |                 |
| 66587814 | 0              | 2,800                        | 3,975                         | 9,700                         | Stainless Steel |
|          | 30             | 2,900                        | 3,975                         | 9,700                         | Stainless Steel |
|          | 45             | 2,500                        | 3,975                         | 9,700                         | Stainless Steel |
|          | 60             | 2,400                        | 3,975                         | 9,700                         | Stainless Steel |
|          | 90             | 3,400                        | 3,975                         | 9,700                         | Stainless Steel |

All values tested with Rails 41x41x2.5mm.

$F_{a,z}/F_{a,z1}$  tested with M12 x 25mm Hex. Bolt Gr. 8.8 DIN 933 & M12 Slide Nut 651868012 through open profile of rail, tightened with 40Nm.

$F_{a,z2}$  tested with M12 x 25mm Hex. Bolt Gr. 8.8 DIN 933 through slotted section of rail into M12 Slide Nut, tightened with 40Nm.



UK +44 1295 75 34 00  
NL +31 297 23 30 00  
BE +32 16 82 20 40  
FR +33 4 76 04 10 70  
ES +34 93 721 33 75

DE/AT/CH +49 921 75600  
DK/NO +45 46 37 05 10  
SE +46 40 36 54 20  
PL +48 880 757 351  
IT +34 93 721 33 75

CZ/SK +420 326 724 009  
HU/RO +36 1 920 2458  
HR +381 61 44 46 444  
US +1 800 610 5056  
CA +1 800-263-8652

UA +380 44 351 27 47  
SG +65 6970 0605  
UAE +971 4 8821 114  
Other countries  
+31 297 23 30 00