


Walraven RapidStrut®


Ondersteuningssysteem

Technische gegevens


Muurplaat (scharnierend)

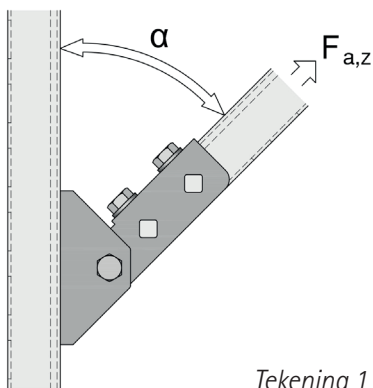

Tekening 1

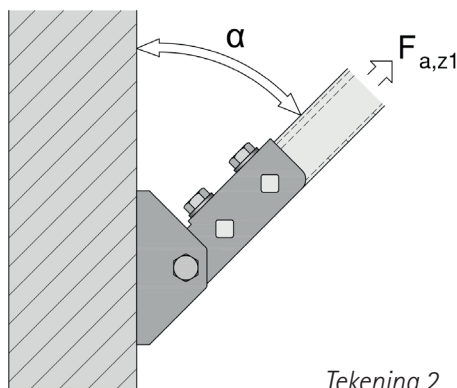

Tekening 2

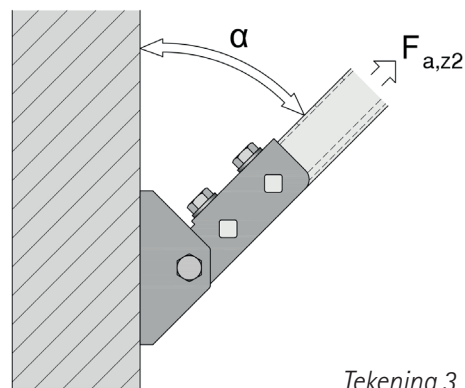

Tekening 3

Productgegevens

Art. nr.	α°	Fa,z (N) (Tekening 1)	Fa,z1 (N) (Tekening 2)	Fa,z2 (N) (Tekening 3)	
66588814	0	2,800	3,975	9,700	BIS UltraProtect 3000
	30	2,900	3,975	9,700	BIS UltraProtect 3000
	45	2,500	3,975	9,700	BIS UltraProtect 3000
	60	2,400	3,975	9,700	BIS UltraProtect 3000
	90	3,400	3,975	9,700	BIS UltraProtect 3000
66587814	0	2,800	3,975	9,700	Roestvast Staal
	30	2,900	3,975	9,700	Roestvast Staal
	45	2,500	3,975	9,700	Roestvast Staal
	60	2,400	3,975	9,700	Roestvast Staal
	90	3,400	3,975	9,700	Roestvast Staal

Alle waarden zijn getest met 41x41x2,5mm rail.

Fa,z/Fa,z1 getest met M12 x 25mm zeskantbout Gr 8.8 DIN 933 & M12 schuifmoer 651868012 door het open profiel van de rail, aangedraaid met 40Nm.

Fa,z2 getest met M12 x 25mm zeskantbout Gr 8.8 DIN 933 door het gatenpatroon van de rail in de M12 schuifmoer, aangedraaid met 40Nm.



UK +44 1295 75 34 00
NL +31 297 23 30 00
BE +32 16 82 20 40
FR +33 4 76 04 10 70
ES +34 93 721 33 75

DE/AT/CH +49 921 75600
DK/NO +45 46 37 05 10
SE +46 40 36 54 20
PL +48 880 757 351
IT +34 93 721 33 75

CZ/SK +420 326 724 009
HU/RO +36 1 920 2458
HR +381 61 44 46 444
US +1 800 610 5056
CA +1 800-263-8652

UA +380 44 351 27 47
SG +65 6970 0605
UAE +971 4 8821 114
Other countries
+31 297 23 30 00