



## Information and Load Tables

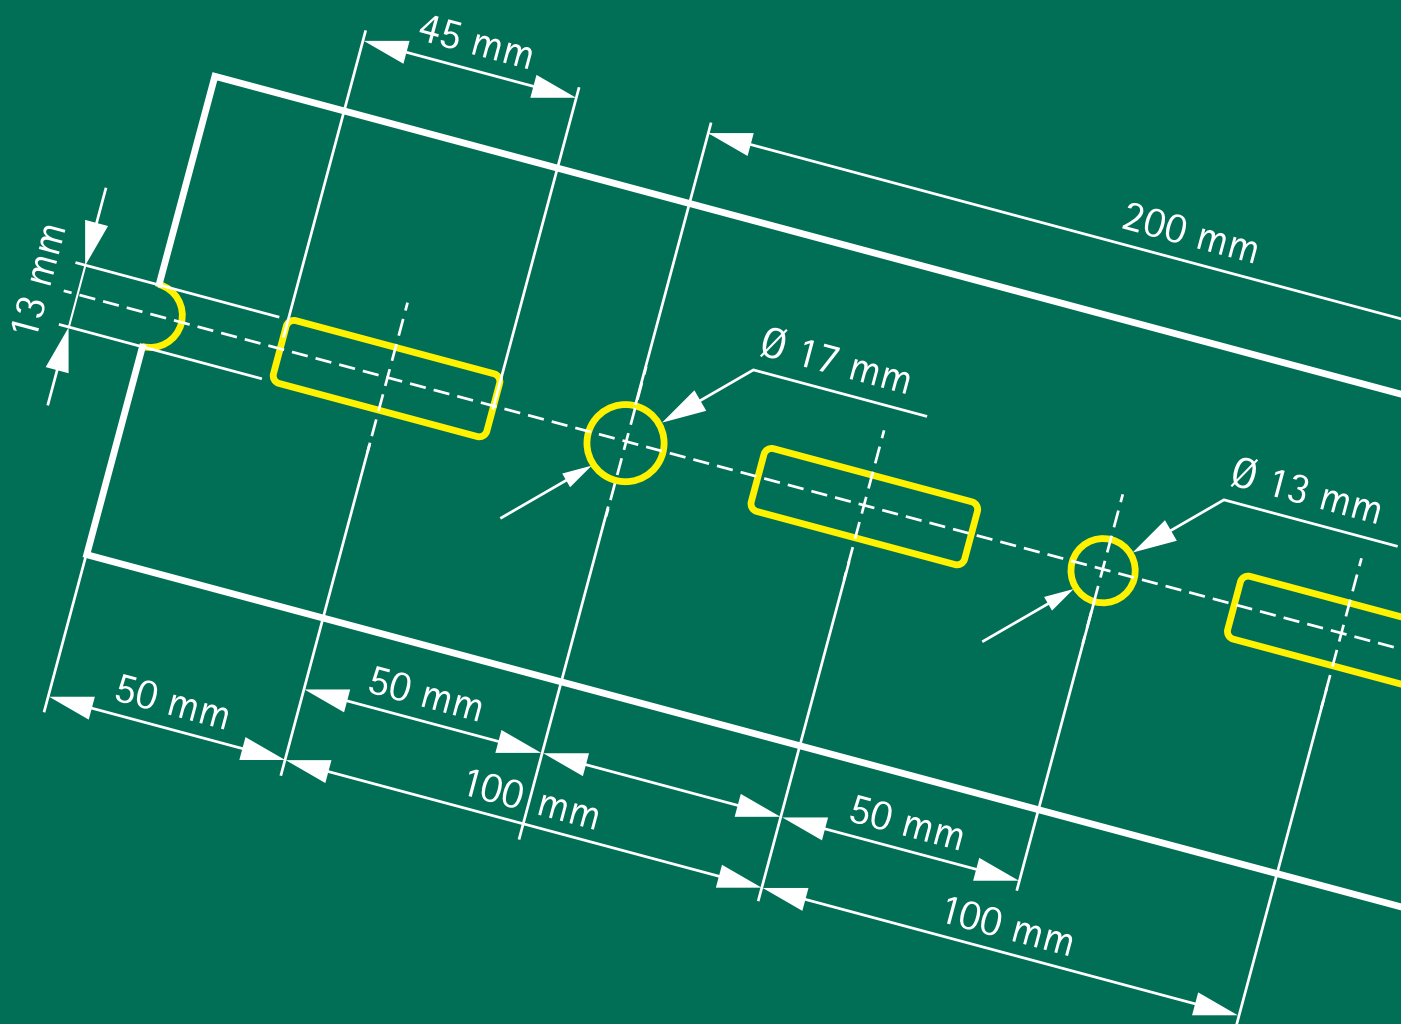

## Technical Data Sheet Walraven Maxx Heavy Profiles Support System

# Walraven Maxx Heavy Profiles Support System

Table of rail section properties

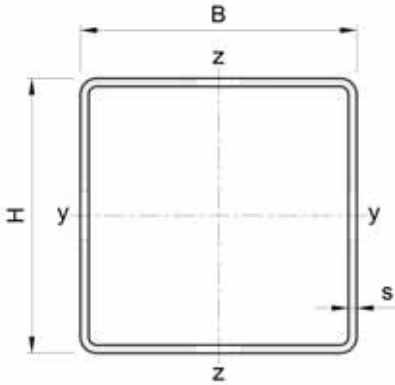


Profile size			Unit Weight	Cross Section Area	Geometrical Moment of Inertia		Geometrical Section Modulus	
H	B	s			$I_y$	$I_z$	$W_y$	$W_z$
mm	mm	mm	kg	mm <sup>2</sup>	cm <sup>4</sup>	cm <sup>4</sup>	cm <sup>3</sup>	cm <sup>3</sup>
80.00	80.00	3.00	6.64	809.02	80.92	80.92	20.23	20.23
100.00	100.00	3.00	8.60	1,049.02	166.13	166.13	33.23	33.22
120.00	100.00	4.00	12.43	1,532.39	327.68	248.97	54.61	49.79
150.00	100.00	4.00	14.38	1,772.36	561.82	304.30	74.91	60.86

## Perforation pattern of rails

Distance between rail end and first hole is always equal.

### Walraven Maxx Profile

- MX80 (80 x 80 x 3 mm)
- MX100 (100 x 100 x 3 mm)
- MX120 (120 x 100 x 4 mm)
- MX150 (150 x 100 x 4 mm)

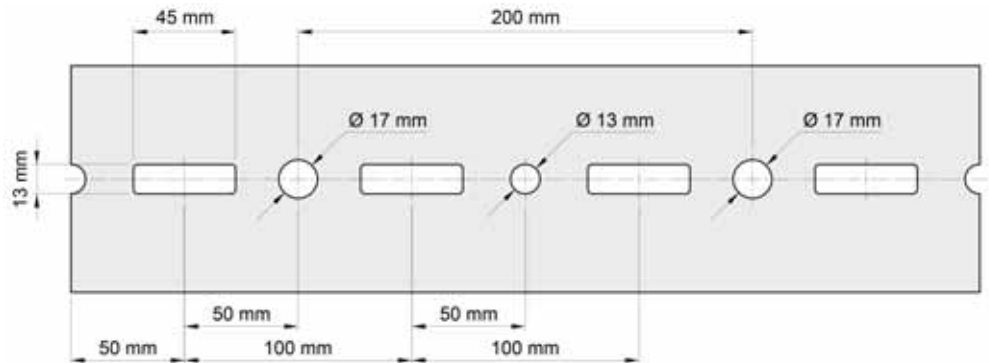

## Profile length & Prefab

The standard length of profiles on stock is 6 meters.

Custom length such as shorter or longer profiles up to 8 meters or project specific length can be manufactured on request.

Please contact our Technical Sales Support with such requests.

## Calculation method

The published safe working loads are calculated with perforated (slotted) rail.

Loads are calculated with the maximum deflection ( $f$ ) of  $L/200$  (according to RAL-GZ 655/B), safety factor " $\lambda$ " = 1.54, yield strength  $f_y = 235 \text{ N/mm}^2$ , E-Module  $210,000 \text{ N/mm}^2$  (see picture 1).

The weight of the product is always included.

1 N (Newton) = 0.102 kg

1 kg = 9.8 N (Newton)

## Fixing of rails to walls or ceilings

The strength of the anchoring of the rail is not taken into account.


The installer must verify if the bolts and wall plugs used are suitable when the rail is used under its maximum load.

## Reading the rail loading tables


The stated values are only valid for the fixing rail itself (profile safe load table) and for the combination of Baseplate / Profile as cantilever arm application (cantilever arm safe load table). The maximum safe load of all other construction parts has to be verified. The stated maximum safe load is calculated for a static load at free bending support (see picture 2).

## Special conditions

In the case of doubt or special conditions that are not stated in the loading tables, please do not hesitate to contact our Technical Sales Support.

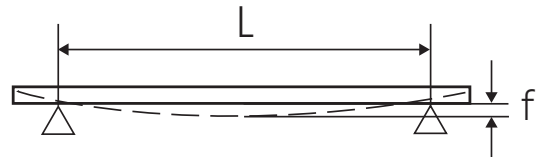

Picture 1

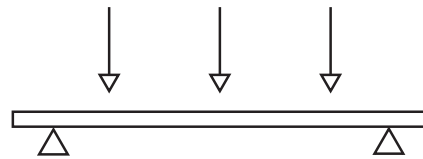


Picture 2


## Walraven Maxx Heavy Rail Profile MX80

L	Walraven Maxx Heavy Rail Profile MX80 (80 x 80 x 3)			
	1 x F	2 x F	3 x F	q
(mm)	(N)	(N)	(N)	(N)
2,000	6,109	4,587	3,054	12,218
2,250	5,415	4,067	2,707	10,830
2,500	4,858	3,650	2,429	9,716
2,750	4,400	3,099	2,200	8,449
3,000	4,018	2,588	1,856	7,055
3,250	3,693	2,188	1,570	5,966
3,500	3,186	1,870	1,341	5,099
3,750	2,747	1,612	1,156	4,396
4,000	2,386	1,400	1,004	3,818
4,250	2,085	1,223	877	3,336
4,500	1,830	1,074	770	2,929
4,750	1,614	947	679	2,582
5,000	1,427	838	601	2,284
5,250	1,266	743	533	2,025
5,500	1,124	660	473	1,799
5,750	999	586	420	1,599
6,000	888	521	374	1,422


Suspension on 1 point




2 equal loads



3 equal loads



Uniformly distributed load




Max. allowed load in N per suspension point (F), or per uniformly distributed load (q).

The stated values are only valid for fixing profile. The maximum safe load of all other construction parts has to be verified.


## Walraven Maxx Baseplate with Maxx Profile MX80 (Cantilever Arm Application)

L	Walraven Maxx Heavy Rail MX80 (80 x 80 x 3)	
	1 x F	q
(mm)	(N)	(N)
500	4,877	9,754
550	4,430	8,861
600	4,058	8,116
650	3,742	7,485
700	3,472	6,944
750	3,237	6,475
800	3,032	6,064
850	2,850	5,701
900	2,689	5,378
950	2,544	5,088
1,000	2,414	4,828
1,050	2,286	4,591
1,100	2,079	4,376
1,200	1,740	3,999
1,300	1,476	3,679
1,400	1,266	3,376
1,500	1,096	2,923


Suspension on 1 point at the end



Uniformly distributed load



Application

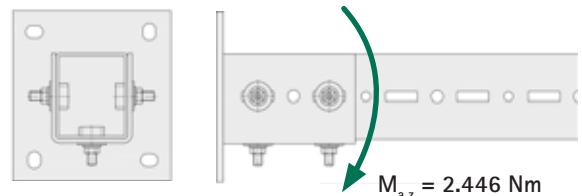

Max. allowed load in N per suspension point (F), or per uniformly distributed load (q).


The stated values are only valid for the cantilever arm application, using Walraven Maxx Baseplate and Maxx Profiles, connected by Maxx Hammerfix.

For all load specifications for cantilever arm application, the maximum allowed Moment ( $M_{a,z}$ ) of the Walraven Maxx Baseplate was considered with 2,446 Nm. The maximum safe load of all other construction parts has to be verified.


## Walraven Maxx Heavy Rail Profile MX100

L	Walraven Maxx Heavy Rail Profile MX100 (100 x 100 x 3)			
	1 x F	2 x F	3 x F	q
(mm)	(N)	(N)	(N)	(N)
2,000	10,056	7,549	5,028	20,112
2,250	8,919	6,697	4,459	17,838
2,500	8,007	6,014	4,003	16,014
2,750	7,259	5,453	3,629	14,518
3,000	6,633	4,985	3,316	13,267
3,250	6,103	4,552	3,051	12,206
3,500	5,647	3,903	2,800	10,641
3,750	5,250	3,378	2,423	9,210
4,000	4,901	2,947	2,114	8,035
4,250	4,411	2,589	1,857	7,058
4,500	3,897	2,287	1,641	6,236
4,750	3,460	2,031	1,457	5,536
5,000	3,085	1,811	1,299	4,936
5,250	2,761	1,620	1,162	4,417
5,500	2,477	1,454	1,043	3,964
5,750	2,229	1,308	938	3,566
6,000	2,009	1,179	846	3,215
6,500	1,639	962	690	2,622
7,000	1,339	786	564	2,143
7,500	1,093	641	460	1,748
8,000	886	520	373	1,418


Suspension on 1 point




2 equal loads



3 equal loads



Uniformly distributed load




Max. allowed load in N per suspension point (F), or per uniformly distributed load (q).

The stated values are only valid for fixing profile. The maximum safe load of all other construction parts has to be verified.


## Walraven Maxx Baseplate with Maxx Profile MX100 (Cantilever Arm Application)

L	Walraven Maxx Heavy Rail MX100 (100 x 100 x 3)	
	1 x F	q
(mm)	(N)	(N)
500	6.963	13.926
550	6.325	12.651
600	5.794	11.589
650	5.344	10.689
700	4.959	9.918
750	4.624	9.248
800	4.331	8.662
850	4.072	8.144
900	3.842	7.684
950	3.635	7.271
1.000	3.449	6.899
1.050	3.281	6.562
1.100	3.128	6.256
1.200	2.859	5.718
1.300	2.631	5.262
1.400	2.435	4.870
1.500	2.264	4.529


Suspension on 1 point at the end



Uniformly distributed load



Application

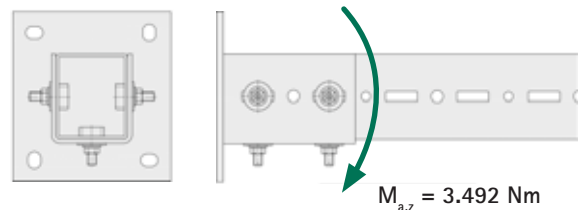

Max. allowed load in N per suspension point (F), or per uniformly distributed load (q).


The stated values are only valid for the cantilever arm application, using Maxx Baseplate and Maxx Profiles, connected by Maxx Hammerfix.

For all load specifications for cantilever arm application, the maximum allowed Moment ( $M_{a,z}$ ) of the Maxx Baseplate was considered with 3.492 Nm. The maximum safe load of all other construction parts has to be verified.


## Walraven Maxx Heavy Rail Profile MX120

L	Walraven Maxx Heavy Rail Profile MX120 (120 x 100 x 4)			
	1 x F	2 x F	3 x F	q
(mm)	(N)	(N)	(N)	(N)
2,000	16,545	12,419	8,272	33,091
2,250	14,678	11,020	7,339	29,356
2,500	13,181	9,898	6,590	26,363
2,750	11,954	8,979	5,977	23,908
3,000	10,928	8,211	5,464	21,857
3,250	10,058	7,560	5,029	20,117
3,500	9,310	7,000	4,655	18,621
3,750	8,660	6,514	4,330	17,321
4,000	8,089	5,879	4,044	16,027
4,250	7,584	5,176	3,713	14,111
4,500	7,133	4,585	3,289	12,500
4,750	6,728	4,083	2,929	11,132
5,000	6,224	3,653	2,621	9,959
5,250	5,591	3,282	2,354	8,946
5,500	5,040	2,958	2,122	8,064
5,750	4,556	2,674	1,918	7,291
6,000	4,130	2,424	1,739	6,608
6,500	3,413	2,003	1,437	5,461
7,000	2,836	1,665	1,194	4,539
7,500	2,364	1,387	995	3,783
8,000	1,970	1,156	829	3,153


Suspension on 1 point




2 equal loads



3 equal loads






Uniformly distributed load



Max. allowed load in N per suspension point (F), or per uniformly distributed load (q).

The stated values are only valid for fixing profile. The maximum safe load of all other construction parts has to be verified.


## Walraven Maxx Baseplate with Maxx Profile MX120 (Cantilever Arm Application)

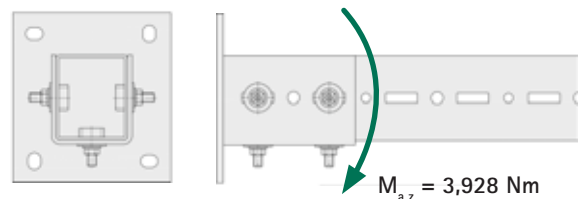


## Walraven Maxx Heavy Rail Profile MX150

L	Walraven Maxx Heavy Rail Profile MX150 (150 x 100 x 4)			
	1 x F	2 x F	3 x F	q
(mm)	(N)	(N)	(N)	(N)
2,000	22,721	17,052	11,360	45,442
2,250	20,163	15,135	10,081	40,326
2,500	18,113	13,599	9,056	36,226
2,750	16,433	12,340	8,216	32,866
3,000	15,029	11,290	7,514	30,059
3,250	13,839	10,398	6,919	27,679
3,500	12,817	9,633	6,408	25,634
3,750	11,928	8,968	5,964	23,857
4,000	11,148	8,385	5,574	22,297
4,250	10,458	7,869	5,229	20,917
4,500	9,843	7,409	4,921	19,687
4,750	9,291	6,996	4,645	18,582
5,000	8,792	6,389	4,396	17,417
5,250	8,339	5,758	4,130	15,696
5,500	7,925	5,209	3,737	14,201
5,750	7,546	4,729	3,392	12,891
6,000	7,197	4,306	3,089	11,738
6,250	6,697	3,931	2,820	10,716
6,500	6,128	3,597	2,580	9,806
6,750	5,619	3,298	2,366	8,991
7,000	5,161	3,029	2,173	8,258
7,250	4,747	2,786	1,999	7,596
7,500	4,372	2,566	1,841	6,996
7,750	4,031	2,366	1,697	6,449
8,000	3,719	2,182	1,565	5,950


### Suspension on 1 point




### 2 equal loads



### 3 equal loads




### Uniformly distributed load



Max. allowed load in N per suspension point (F), or per uniformly distributed load (q).

The stated values are only valid for fixing profile. The maximum safe load of all other construction parts has to be verified.

## Walraven Maxx Heavy Rail Profile: buckling load

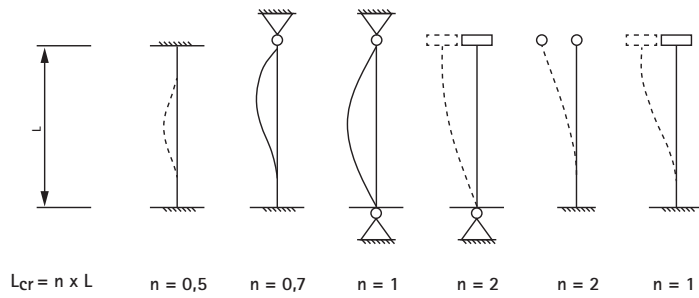

	Translation Free	Translation Fixed
Rotation Free		
Rotation Fixed		

L <sub>cr</sub> (mm)	MX80 (kN)	MX100 (kN)	MX120 (kN)	MX150 (kN)
200	123,45	160,08	233,84	270,46
400	123,45	160,08	233,84	270,46
600	123,33	160,08	233,84	270,46
800	119,10	158,93	232,48	269,68
1 000	114,85	154,58	226,21	262,62
1 200	110,51	150,21	219,91	255,54
1 400	106,03	145,77	213,53	248,38
1 600	101,36	141,24	207,00	241,08
1 800	96,51	136,57	200,29	233,58
2 000	91,48	131,76	193,38	225,86
2 200	86,33	126,79	186,24	217,90
2 400	81,11	121,67	178,89	209,70
2 600	75,92	116,42	171,35	201,29
2 800	70,83	111,09	163,67	192,70
3 000	65,93	105,71	155,92	184,00
3 500	54,83	92,44	136,73	162,30
4 000	45,63	80,07	118,72	141,67
4 500	38,22	69,11	102,67	123,06
5 000	32,32	59,73	88,87	106,88
5 500	27,60	51,84	77,22	93,10
6 000	23,80	45,24	67,45	81,48
6 500	20,71	39,73	59,27	71,71
7 000	18,17	35,11	52,40	63,48
7 500	16,06	31,21	46,61	56,51
8 000	14,29	27,91	41,69	50,59
<b>Recommended buckling length (mm)</b>	6 000	8 000	8 000	8 000

L<sub>cr</sub> = Buckling Length

Buckling force calculation according to EC3.

Buckling safe loads valid only for pure compression load.

Safety factor considered 1.54 according to RAL (represents 1.1 from material and 1.4 for combination of actions).

Buckling safe loads have been calculated according the minimum inertia direction (worse case scenario).

Load values for "L<sub>cr</sub>" above recommended; not recommended without previous consultation.

### Example

- Profile type: MX100
- Profile length: 1,4 m
- 1 support with rotation and translation fixed and 1 support with rotation and translation free

- n = 2
- L<sub>cr</sub> = 1400 x 2 = 2800 mm
- Buckling load = 111.09 kN

## Zistite, ako vám môžeme pomôcť

Chcete sa dozvedieť viac o niektorom z riešení popísaných v tejto brožúre?

Alebo by ste chceli prediskutovať, ako by sme vám mohli pomôcť nájsť najlepšie možné riešenie pre váš projekt?

Kontaktujte nás ešte dnes!

Česká republika  
Slovenská republika

**Walraven s.r.o.**

Bezděčín 88

293 01 Mladá Boleslav (CZ)

Tel. +420 326 724 009

prodej.cz@walraven.com

Technická špecifikácia Walraven RapiuStrut® Montážne lišty (SK) – 05/2025 – PDF – Akékoľvek zmeny vyhradené  
\* Technické údaje nie sú záväzné a neovplyvňujú určené vlastnosti výrobkov. Podliehajú zmenám. Preštudujte si prosím naše všeobecné  
obchodné podmienky. Ďalšie informácie sú k dispozícii na vyžiadanie. Výber výrobkov vhodných pre predpokladaný účel a zabezpečenie  
neprekročenia technických údajov je na zodpovednosť projektanta. Vždy si treba prečítať návod na inštaláciu a postupovať podľa neho.