


Walraven starQuick® Clamp (Grey)

(C0505)

for securing conduits and pipes to walls, floors, or ceilings

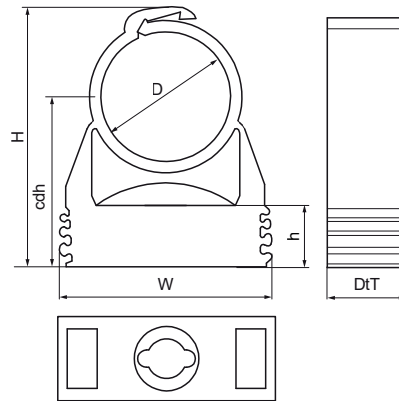

Features & benefits

- one-part clamp
- clamp closes by applying pressure to the pipe
- for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
- due to a patented profile it is possible to tack several clamps to each other
- material: modified PA6 (polyamide), grey (according to RAL 7035)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C



Product Number	RSK Number	Total Height	Total Width	Total Depth	Clamp Center Distance Height	Height	Connection Thread	Maximum Allowed Load Faz	Breaking Load Fbz
Reference letter		H	W	DtT	cdh	h	G	F _{a,z}	F _{b,z}
Unit description		mm	mm	mm	mm	mm		N	N
0854010	3811322	34	29	17	24	10.6	None	170	500
0854012	3811323	36	29	17	25	10.6	None	180	550
0854015	3811324	36	29	17	25	10.6	None	200	600
0854018	3811325	40	29	17	27	10.6	None	230	700
0854022	3811326	43	29	17	28	10.6	None	270	800
0854028	3811327	50	40	18	32	10.6	None	280	850
0854031	3811328	55	40	17	36	10.6	None	300	900
0854035	3811329	59	43	17	37	10.6	None	330	1,000
0854038	3811330	68	47	17	44	12.1	None	330	1,000
0854042		70	52	17	44	12.1	None	330	1,000
0854050	3811331	79	57	17	50	12.1	None	330	1,000
0854054	3811332	82	63	17	50	12.1	None	330	1,000
0854063	3811333	95	74	20	57	12.1	None	500	1,500