


## Walraven Wall Mounting Set 62|H

(H1920)

universal Mounting Set for outdoor appliances

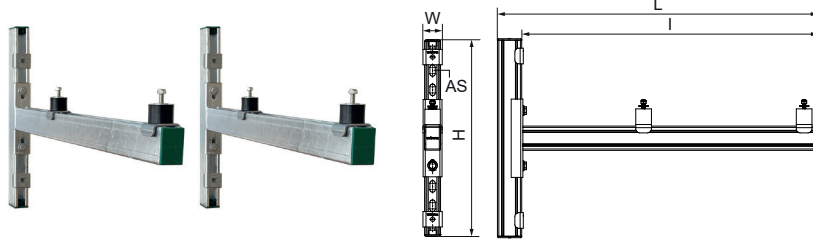

### Features & benefits

- suitable for indoor and outdoor use
- universal mounting brackets for fixing indoor and outdoor appliances to the wall
- designed for the most common standard heat pumps (for heat pump models with female thread, Walraven Wall Mounting ISO Kit 6901998 needs to be ordered separately - see assembly instruction)
- stepless adjustable in height and wall distance
- with anti-vibration mounts type Walraven VibraTek® SB-MM
- material: steel 1.0332
- material: vibration damper; rubber SBR + NR 55°+/-5 Shore A steel class 4.8
- surface treatment: hot dip galvanized (EN-ISO 1461)
- set consists of: - 2 Cantilever Arms type RapidStrut 62|H- 2 lengths of 500mm wall rail type RapidStrut 62|H- 4 vibration dampers with pre-assembled fasteners- 6 rail endcaps- fasteners to connect Cantilever Arms to the wall rail- assembly instruction
- Max. allowed safeload per Set: 1.200 Newton (Total weight of the unit).

| Product Number          | Type   | Length    | Total Height | Total Width | Total Length | Material Thickness | Anchoring Slot | Heart To Heart Distance |
|-------------------------|--------|-----------|--------------|-------------|--------------|--------------------|----------------|-------------------------|
| <i>Reference letter</i> |        | <i>l</i>  | <i>H</i>     | <i>W</i>    | <i>L</i>     | <i>MT</i>          | <i>AS</i>      | <i>k</i>                |
| <i>Unit description</i> |        | <i>mm</i> | <i>mm</i>    | <i>mm</i>   | <i>mm</i>    | <i>mm</i>          | <i>mm</i>      | <i>mm</i>               |
| 6901975                 | 62   H | 750       | 508          | 106         | 821          | 3.00               | 30x11          | 141                     |