


Walraven dB-FiX® 200 Fixing Point Assembly Kit

(E0535)

for noise insulation fixing point

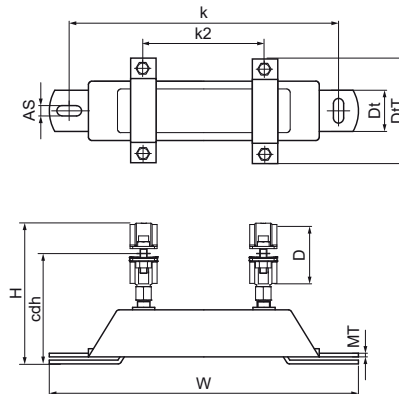

Features & benefits

- very stable
- material: steel
- zinc plated
- noise insulation by moulded EPDM rubber
- sound insulating lining according DIN 4109
- consists of: 1 fixing point assembly Walraven dB-FiX® 200 (Part No. 6693020), 2 heavy duty clamps HD500

| Product Number | Outside Pipe Diameter | Total Height | Total Width | Total Depth | Clamp Center Distance Height | Depth | Anchoring Slot | Heart To Heart Distance | Heart To Heart Distance 2 | Material Thickness | Thread Size | Maximum Allowed Load Faz | Maximum Allowed Load Fay |
|------------------|-----------------------|--------------|-------------|-------------|------------------------------|-------|----------------|-------------------------|---------------------------|--------------------|-------------|--------------------------|--------------------------|
| Reference Letter | D | H | W | DtT | cdh | Dt | AS | k | k 2 | MT | TS | Fa,z | Fa,y |
| Unit description | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | | N | N |
| 2622065 | 72 - 78 | 201 | 375 | 137 | 157 | 50 | 30x12.5 | 325 | 145.5 | 4.00 | M12 | 7,000 | 6,600 |
| 2622080 | 86 - 92 | 208 | 375 | 152 | 164 | 50 | 30x12.5 | 325 | 145.5 | 4.00 | M12 | 7,000 | 6,600 |
| 2622100 | 108 - 116 | 239 | 375 | 175 | 176 | 50 | 30x12.5 | 325 | 145.5 | 4.00 | M12 | 7,000 | 6,600 |
| 2622125 | 132 - 140 | 263 | 375 | 200 | 188 | 50 | 30x12.5 | 325 | 145.5 | 4.00 | M12 | 7,000 | 6,600 |
| 2622150 | 159 - 169 | 292 | 375 | 240 | 202 | 50 | 30x12.5 | 325 | 145.5 | 4.00 | M12 | 7,000 | 6,600 |
| 2622070 | 79 - 85 | 208 | 375 | 144 | 161 | 50 | 30x12.5 | 325 | 145.5 | 4.00 | M12 | 7,000 | 6,600 |