


Walraven 2S Clamp with Lining (M8/10)

(A05136)

for steel, copper, cast iron and plastic (multilayer) pipe

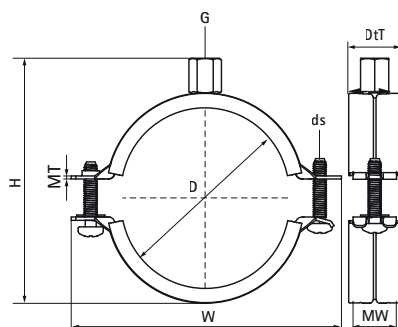

Features & benefits

- gapless range
- rubber lining grips in steel parts to prevent sliding of the lining
- anti loss washers prevent screws from falling out during installation
- material: steel
- zinc plated
- temperature resistance from -30 °C to +120 °C
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 22 dB(A)



Product Number	Outside Pipe Diameter	Connection Thread	Total Width x Total Height x Total Depth	Material Width x Material Thickness	Screw Size	Maximum Allowed Load Faz
Reference letter	D	G	W x H x DtT	MW x MT	ds	Fa,z
Unit description	(mm)		(mm) x (mm) x (mm)	(mm) x (mm)		(N)
33435014	10 - 14	M8/M10	51 x 40 x 23	20 x 1	M5	330
33435019	15 - 19	M8/M10	56 x 45 x 23	20 x 1	M5	330
33435024	20 - 24	M8/M10	62 x 51 x 23	20 x 1	M5	330
33435030	25 - 30	M8/M10	69 x 58 x 23	20 x 1	M5	330
33435037	31 - 37	M8/M10	75 x 64 x 23	20 x 1	M5	330
33435046	38 - 46	M8/M10	84 x 74 x 23	20 x 1.25	M5	500
33435052	47 - 52	M8/M10	93 x 83 x 23	20 x 1.25	M5	500
33435061	53 - 61	M8/M10	99 x 89 x 23	20 x 1.25	M5	500
33435067	62 - 67	M8/M10	106 x 95 x 23	20 x 1.25	M5	500
33435074	68 - 74	M8/M10	118 x 103 x 23	20 x 1.50	M6	850
33435081	75 - 81	M8/M10	124 x 109 x 23	20 x 1.50	M6	850
33435087	82 - 87	M8/M10	130 x 115 x 23	20 x 1.50	M6	850
33435095	88 - 95	M8/M10	143 x 127 x 26	23 x 2	M6	1000
33435103	96 - 103	M8/M10	153 x 136 x 26	23 x 2	M6	1000
33435112	104 - 112	M8/M10	159 x 142 x 26	23 x 2	M6	1000
33435118	113 - 118	M8/M10	168 x 151 x 26	23 x 2	M6	1000
33435127	119 - 127	M8/M10	178 x 161 x 26	23 x 2	M6	1000
33435137	128 - 137	M8/M10	185 x 168 x 26	23 x 2	M6	1000
33435144	138 - 144	M8/M10	194 x 177 x 26	23 x 2	M6	1000
33435153	145 - 153	M8/M10	203 x 186 x 26	23 x 2	M6	1000
33435162	154 - 162	M8/M10	211 x 194 x 26	23 x 2	M6	1000
33435172	163 - 172	M8/M10	227 x 210 x 28	25 x 2.50	M6	2350
33435183	173 - 183	M8/M10	239 x 221 x 28	25 x 2.50	M6	2350
33435194	184 - 194	M8/M10	249 x 232 x 28	25 x 2.50	M6	2350
33435205	195 - 205	M8/M10	260 x 243 x 28	25 x 2.50	M6	2350
33435216	206 - 216	M8/M10	271 x 253 x 28	25 x 2.50	M6	2350
33435225	217 - 225	M8/M10	279 x 261 x 28	25 x 2.50	M6	2350