


Walraven RapidStrut® Rail Connector 90° G2 (BUP1000)

(H2804)

to make Strut rail fabrications

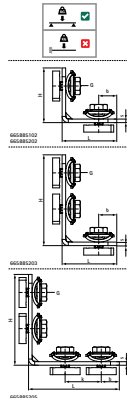

Features & benefits

- connector with pre-assembled Walraven RapidStrut® Slide nut(s)
- to make fabrication with Walraven RapidStrut® Rail
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- 'Direct Twist' technology for easy and secure installation
- visual guide to check the position of the slide nut
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications



Product Number	Angle	Total Width x Total Height x Total Length	Material Thickness	Width	Torque Moment For Installation	Maximum Allowed Load Faz	Maximum Allowed Load Fax
Reference letter	<i>a</i>	<i>W x H x L</i>	<i>MT</i>	<i>w</i>	<i>T inst.</i>	<i>Fa,z</i>	<i>Fa,x</i>
Unit description	(DEG)	(mm) x (mm) x (mm)	(mm)	(mm)	(Nm)	(N)	(N)
665885102	90	40 x 72.75 x 52.75	4	40	40	4000	2270
665885202	90	40 x 72.75 x 72.75	4	40	40	4000	2270
665885203	90	40 x 113.75 x 72.75	4	40	40	4000	2270
665885205	90	40 x 113.75 x 113.75	4	40	40	4500	4700