


Walraven KSB1 Clamp (M8)

(A05108)

for steel, copper, cast iron and plastic (multilayer) pipe

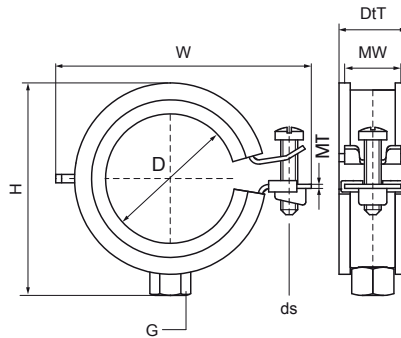

Features & benefits

- single screw clamp
- with quick locking system, type KSB
- clamp easy to close with one hand
- material: steel
- zinc plated
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)



Productnumber	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Material Width	Material Thickness	Screw Size	Total Height	Total Width	Total Depth	Approvals	Maximum Allowed Load Faz
Reference Letter	D	DN	D	G	MW	MT	ds	H	W	DtT		F _{0,z}
Unit description	mm		in		mm	mm		mm	mm	mm		N
3363014	13 - 14	DN 8	1/4	M8	20	1.00	M6	37	47	24	CE, ETA, ISO 3822-1, EPD	350
3363018	15 - 18	DN 10	3/8	M8	20	1.00	M6	38	47	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	350
3363023	20 - 23	DN 15	1/2	M8	20	1.00	M6	43	52	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	350
3363028	25 - 28	DN 20	3/4	M8	20	1.00	M6	48	57	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	450
3363035	32 - 35	DN 25	1	M8	20	1.00	M6	55	63	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	450
3363043	40 - 43	DN 32	1 1/4	M8	20	1.25	M6	63	72	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	600
3363051	48 - 51	DN 40	1 1/2	M8	20	1.25	M6	71	80	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	600
3363054	53 - 56	-	-	M8	20	1.25	M6	76	85	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	600
3363062	58 - 63	DN 50	2	M8	20	1.25	M6	82	91	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	600