


## Walraven BISMAT® 2000 (M8) 1-screw

(A0517)

for steel, copper, cast iron and plastic (multilayer) pipe

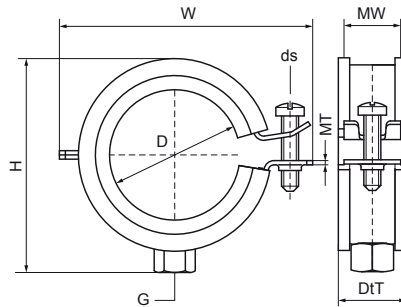

### Features & benefits

- single screw clamp
- with Walraven BISMAT® quick locking system
- material: steel
- zinc plated
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)
- tested for fire safety



| Productnumber    | Outside<br>Pipe<br>Diameter | DN    | Pipe<br>Diameter<br>Imperial | Connection<br>Thread | Material<br>Width | Material<br>Thickness | Screw<br>Size | Total<br>Height | Total<br>Width | Total<br>Depth | Approvals                                                     | Maximum<br>Allowed<br>Load<br>Faz |
|------------------|-----------------------------|-------|------------------------------|----------------------|-------------------|-----------------------|---------------|-----------------|----------------|----------------|---------------------------------------------------------------|-----------------------------------|
| Reference Letter | D                           | DN    | D                            | G                    | MW                | MT                    | ds            | H               | W              | DtT            |                                                               | F <sub>0,z</sub>                  |
| Unit description | mm                          |       | in                           |                      | mm                | mm                    |               | mm              | mm             | mm             |                                                               | N                                 |
| 3413014          | 11 - 14                     | DN 8  | 1/4                          | M8                   | 20                | 1.00                  | M6            | 37              | 47             | 24             | ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, RAL-GZ 656, EPD | 600                               |
| 3413018          | 15 - 18                     | DN 10 | 3/8                          | M8                   | 20                | 1.00                  | M6            | 38              | 47             | 25             | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD | 600                               |
| 3413023          | 20 - 23                     | DN 15 | 1/2                          | M8                   | 20                | 1.00                  | M6            | 43              | 52             | 25             | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD | 600                               |
| 3413028          | 25 - 28                     | DN 20 | 3/4                          | M8                   | 20                | 1.00                  | M6            | 48              | 57             | 25             | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD | 600                               |
| 3413035          | 31 - 35                     | DN 25 | 1                            | M8                   | 20                | 1.00                  | M6            | 55              | 64             | 25             | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD | 600                               |
| 3413039          | 36 - 39                     | -     | -                            | M8                   | 20                | 1.25                  | M6            | 64              | 72             | 26             | ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, RAL-GZ 656      | 800                               |
| 3413043          | 40 - 43                     | DN 32 | 1 1/4                        | M8                   | 20                | 1.25                  | M6            | 63              | 72             | 25             | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD | 800                               |
| 3413045          | 44 - 45                     | -     | -                            | M8                   | 20                | 1.25                  | M6            | 63              | 72             | 25             | ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, RAL-GZ 656      | 800                               |
| 3413053          | 48 - 51                     | DN 40 | 1 1/2                        | M8                   | 20                | 1.25                  | M6            | 71              | 80             | 25             | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD | 800                               |
| 3413054          | 53 - 56                     | -     | -                            | M8                   | 20                | 1.25                  | M6            | 76              | 85             | 25             | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD | 800                               |
| 3413063          | 59 - 63                     | DN 50 | 2                            | M8                   | 20                | 1.25                  | M6            | 82              | 91             | 25             | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD | 800                               |