


## Walraven 2S Clamp (M8)

(B0523)

for insulated pipe, steel, cast iron and plastic (multilayer) pipe

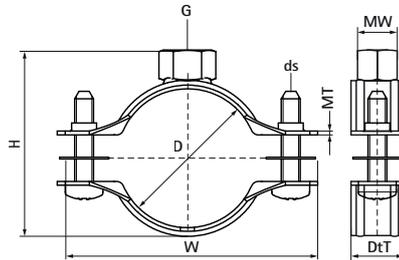

### Features & benefits

- gapless range
- anti loss washers prevent screws from falling out during installation
- perfect solution for insulated pipe supports
- material: steel
- zinc plated



EPD

Product Number	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
Reference letter	D	D	G	H	W	DtT	MW	MT	ds	F <sub>0,2</sub>	
Unit description											N
				mm	mm	mm	mm	mm			
33025014	DN 6	-	M8	27	46	20	20	1.00	M5	700	ITB (KOT), RAL-GZ 655/B, EPD
33025019	DN 10	3/8	M8	32	51	20	20	1.00	M5	700	ITB (KOT), RAL-GZ 655/B, EPD
33025024	DN 15	1/2	M8	37	56	20	20	1.00	M5	700	ITB (KOT), RAL-GZ 655/B, EPD
33025030	DN 20	3/4	M8	43	62	20	20	1.00	M5	700	ITB (KOT), RAL-GZ 655/B, EPD
33025037	DN 25	1	M8	50	69	20	20	1.00	M5	700	ITB (KOT), RAL-GZ 655/B, EPD
33025046	DN 32	1 1/4	M8	60	78	20	20	1.25	M5	850	ITB (KOT), RAL-GZ 655/B, EPD
33025052	DN 40	1 1/2	M8	66	84	20	20	1.25	M5	850	ITB (KOT), RAL-GZ 655/B, EPD
33025061	DN 50	2	M8	75	93	20	20	1.25	M5	850	ITB (KOT), RAL-GZ 655/B, EPD
33025067	-	-	M8	81	99	20	20	1.25	M5	850	ITB (KOT), RAL-GZ 655/B, EPD