


Walraven starQuick® Clamp (Grey)

(C0505)

for securing conduits and pipes to walls, floors, or ceilings

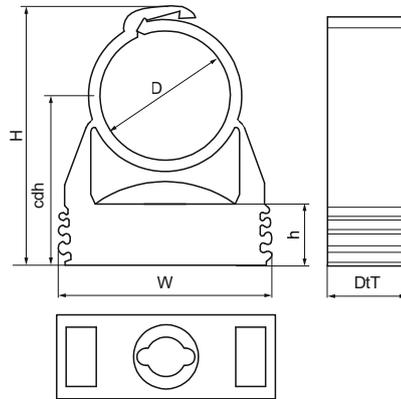

Features & benefits

- one-part clamp
- clamp closes by applying pressure to the pipe
- for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
- due to a patented profile it is possible to tack several clamps to each other
- material: modified PA6 (polyamide), grey (according to RAL 7035)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C



Product Number	Fixing Hole	Total Height	Total Width	Total Depth	Clamp Center Distance Height	Height	Connection Thread	Maximum Allowed Load F _{a,z}	Breaking Load F _{b,z}
Reference letter	FH	H	W	DtT	cdh	h	G	F _{a,z}	F _{b,z}
Unit description	mm	mm	mm	mm	mm	mm		N	N
0854010	8	34	29	17	24	10.6	None	170	500
0854012	8	36	29	17	25	10.6	None	180	550
0854015	8	36	29	17	25	10.6	None	200	600
0854018	8	40	29	17	27	10.6	None	230	700
0854022	8	43	29	17	28	10.6	None	270	800
0854028	8	50	40	18	32	10.6	None	280	850
0854031	8	55	40	17	36	10.6	None	300	900
0854035	8	59	43	17	37	10.6	None	330	1,000
0854038	8	68	47	17	44	12.1	None	330	1,000
0854042	8	70	52	17	44	12.1	None	330	1,000
0854050	8	79	57	17	50	12.1	None	330	1,000
0854054	8	82	63	17	50	12.1	None	330	1,000
0854063	8	95	74	20	57	12.1	None	500	1,500