


## Walraven dB-FiX® 80 Fixing Point Assembly

(E0520)

for noise insulation fixing point

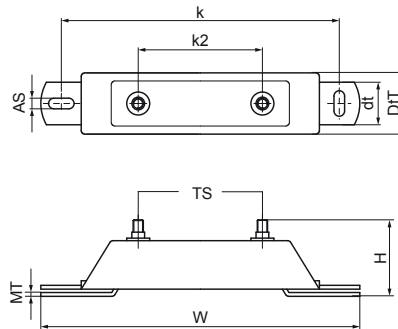

### Features & benefits

- noise insulating fixing point for pipes up to Ø 2" (clamp Walraven HD500 Ø 59 - 65 mm)
- very stable
- material: steel
- zinc plated
- noise insulation by moulded EPDM rubber
- sound insulating lining according DIN 4109



| Productnumber    | Outside<br>Pipe<br>Diameter | Total<br>Height | Total<br>Width | Total<br>Depth | Depth | Anchoring<br>Slot | Heart<br>To Heart<br>Distance | Heart<br>To Heart<br>Distance<br>2 | Material<br>Thickness | Thread<br>Size | Maximum<br>Allowed<br>Load<br>Faz | Maximum<br>Allowed<br>Load<br>Fay |
|------------------|-----------------------------|-----------------|----------------|----------------|-------|-------------------|-------------------------------|------------------------------------|-----------------------|----------------|-----------------------------------|-----------------------------------|
| Reference Letter | D                           | H               | W              | DtT            | Dt    | AS                | k                             | k 2                                | MT                    | TS             | Fa,z                              | Fa,y                              |
| Unit description | mm                          | mm              | mm             | mm             | mm    | mm                | mm                            | mm                                 | mm                    |                | N                                 | N                                 |
| 6693008          | 19 - 63                     | 80              | 290            | 54             | 30    | 20x10.5           | 250                           | 100                                | 3.00                  | M10            | 3,000                             | 2,700                             |