


Walraven RapidStrut® U-Connector linear (BUP1000)

(H28103)

for linear rail connections

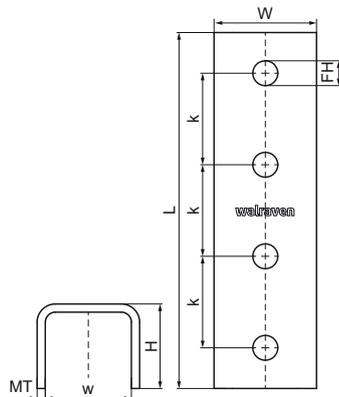

Features & benefits

- U-shaped for extra stability
- longitudinal connector for all Walraven RapidStrut® rails
- for strong connections and in combination with Double Walraven RapidStrut® rails it is advised to use linear connectors on both sides of the rail
- the hole pattern is adapted to the hole pattern of Walraven RapidStrut® rails to use throughbolts
- material: steel 1.0242 (S250GD) + ZM310 MAC
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Product Number	For Rail Type	Total Height	Total Width	Total Length	Material Thickness	Width	Fixing Hole	Heart To Heart Distance	Torque Moment For Installation
Reference letter		<i>H</i>	<i>W</i>	<i>L</i>	<i>MT</i>	<i>w</i>	<i>FH</i>	<i>k</i>	<i>T_{inst.}</i>
Unit description		mm	mm	mm	mm	mm	mm	mm	Nm
66588141	41x21, 41x41, 41x51, 41x62, 41x82	41.5	50	175	4.00	42	12.2	45	25
66588121	41x21, 41x41, 41x51, 41x62, 41x82	21.5	50	175	4.00	42	12.2	45	25