


Walraven 2S Clamp (M8)

(B0523)

for insulated pipe, steel, cast iron and plastic (multilayer) pipe

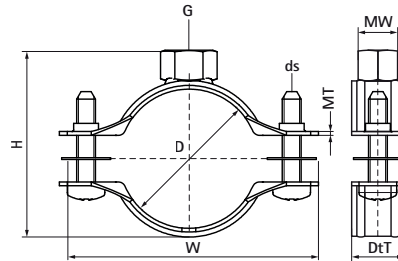

Features & benefits

- gapless range
- anti loss washers prevent screws from falling out during installation
- perfect solution for insulated pipe supports
- material: steel
- zinc plated



EPD

| Product Number | DN | Pipe Diameter Imperial | Connection Thread | Total Height | Total Width | Total Depth | Material Width | Material Thickness | Screw Size | Maximum Allowed Load Faz | Approvals |
|------------------|-------|------------------------|-------------------|--------------|-------------|-------------|----------------|--------------------|------------|--------------------------|------------------------------|
| Reference letter | D | D | G | H | W | DtT | MW | MT | ds | F _{a,z} | |
| Unit description | | | | | | | | | | | N |
| | | | | mm | mm | mm | mm | mm | | | |
| 33025014 | DN 6 | - | M8 | 27 | 46 | 20 | 20 | 1.00 | M5 | 700 | ITB (KOT), RAL-GZ 655/B, EPD |
| 33025019 | DN 10 | 3/8 | M8 | 32 | 51 | 20 | 20 | 1.00 | M5 | 700 | ITB (KOT), RAL-GZ 655/B, EPD |
| 33025024 | DN 15 | 1/2 | M8 | 37 | 56 | 20 | 20 | 1.00 | M5 | 700 | ITB (KOT), RAL-GZ 655/B, EPD |
| 33025030 | DN 20 | 3/4 | M8 | 43 | 62 | 20 | 20 | 1.00 | M5 | 700 | ITB (KOT), RAL-GZ 655/B, EPD |
| 33025037 | DN 25 | 1 | M8 | 50 | 69 | 20 | 20 | 1.00 | M5 | 700 | ITB (KOT), RAL-GZ 655/B, EPD |
| 33025046 | DN 32 | 1 1/4 | M8 | 60 | 78 | 20 | 20 | 1.25 | M5 | 850 | ITB (KOT), RAL-GZ 655/B, EPD |
| 33025052 | DN 40 | 1 1/2 | M8 | 66 | 84 | 20 | 20 | 1.25 | M5 | 850 | ITB (KOT), RAL-GZ 655/B, EPD |
| 33025061 | DN 50 | 2 | M8 | 75 | 93 | 20 | 20 | 1.25 | M5 | 850 | ITB (KOT), RAL-GZ 655/B, EPD |
| 33025067 | - | - | M8 | 81 | 99 | 20 | 20 | 1.25 | M5 | 850 | ITB (KOT), RAL-GZ 655/B, EPD |