


## Walraven Sprinkler Clamp HD500 (BUP1000)

(B1205)

for sprinkler pipes

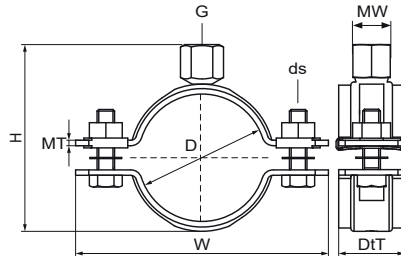

### Features & benefits

- two-part clamp with two locking bolts
- heavy design
- bolts secured with anti-loss washer
- with CO<sub>2</sub> welded connection nut
- material: steel
- surface protection:
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- with VdS approval - certificate number G 4060019



Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
Reference Letter	D	D	D	G	H	W	D <sub>t</sub> T	MW	MT	ds	F <sub>a,z</sub>	
Unit description	mm		"		mm	mm	mm	mm	mm		N	
4503027	25 - 30	DN 20	¾	M8/M10	57	85	32	30	2.50	M8	2,700	VdS, ITB (KOT), EPD
4503033	31 - 36	DN 25	1	M8/M10	63	91	32	30	2.50	M8	2,700	VdS, ITB (KOT), EPD
4503042	40 - 45	DN 32	1¼	M8/M10	71	102	32	30	2.50	M8	2,700	VdS, ITB (KOT), EPD
4503048	47 - 52	DN 40	1½	M8/M10	78	109	32	30	2.50	M8	2,700	VdS, ITB (KOT), EPD
4503060	59 - 65	DN 50	2	M8/M10	90	121	32	30	2.50	M8	2,700	VdS, ITB (KOT), EPD
4503076	72 - 78	DN 65	2½	M10	112	137	32	30	3.00	M8	5,000	VdS, ITB (KOT), EPD
4503114	108 - 116	DN 100	4	M10	151	175	32	30	3.00	M8	5,000	VdS, ITB (KOT), EPD
4503168	159 - 169	DN 150	6	M12	192	241	38	38	4.00	M10	5,800	VdS, ITB (KOT), EPD
4503219	208 - 219	DN 200	8	M16	249	291	38	38	4.00	M10	5,800	VdS, ITB (KOT), EPD