


Walraven Cu-FiX Fixing Point for Copper Pipe

(E0565)

for copper pipes

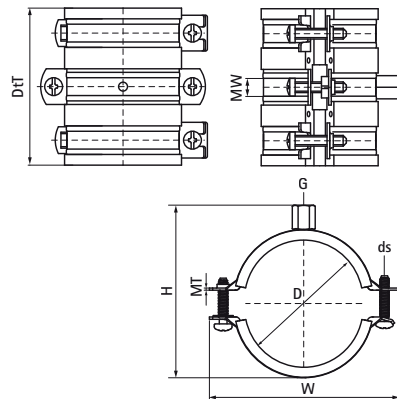

Features & benefits

- to make noise insulating fixpoint for a copper pipe
- temperature resistance up to +120 °C
- noise insulating lining, EPDM rubber, reddish brown
- sound insulating lining according DIN 4109
- consists of: 2 Clamps BISMAT® 2000 (fixing), 1 Clamp 2S (guiding)
- material: steel
- zinc plated

Product Number	Outside Pipe Diameter	DN	Connection Thread	Total Width x Total Height x Total Depth	Material Width x Material Thickness	Screw Size	Maximum Allowed Load Faz
Reference letter	D	D	G	W x H x DtT	MW x MT	ds	F _{0,z}
Unit description	mm			mm x mm x mm	mm x mm		N
3368015	15	-	M8/M10	55 x 34 x 85	20 x 1	M5	1,110
3368018	18	DN 15	M8/M10	58 x 37 x 85	20 x 1	M5	1,110
3368022	22	DN 20	M8/M10	63 x 43 x 85	20 x 1	M5	1,110
3368028	28	DN 25	M8/M10	68 x 47 x 85	20 x 1	M5	1,110
3368035	35	DN 32	M8/M10	75 x 55 x 85	20 x 1	M5	1,110
3368042	42	DN 40	M8/M10	83 x 62 x 85	20 x 1.25	M5	1,240
3368054	54	DN 50	M8/M10	92 x 71 x 85	20 x 1.25	M5	1,240