


Walraven RapidRail® Ball Swivel Hanger

(G3060)

fixing to Walraven RapidRail®

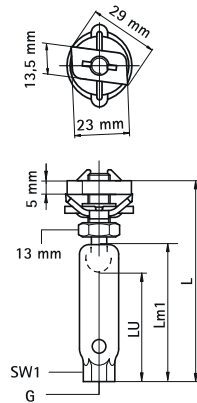

Features & benefits

- slide nut with ball swivel hanger, washer and Walraven RapidRail® spring
- recommended to accomodate pipe expansions for metal pipes up to DN 50, plastic pipes up to DN 100
- suitable for rails 27x18, 30x15, 30x20, 30x30, 30x45
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- with inspection hole to check screw-in depth (attention: when the threaded rod is screwed-in too deep, the ball swivel is blocked)
- screw-in depth is continuously variable (see LU)
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green zinc plated
- Please note. Always use 2 ball swivel hangers and secure by additional hexagon nut (see application picture)
- The maximum length change that can be dealt with, depends on the fixing distance (ceiling - pipe) The height difference that occurs as a result, needs to be taken into consideration.
- To be used in combination with Walraven Ball Swivel Hangers.

Product Number	Total Width x Total Height x Total Length	Usable Length	Maximum Allowed Load Faz
Reference letter	W x H x L	LU	Fa,z
Unit description	(mm) x (mm) x (mm)	(mm)	(N)
6520100	29 x 49 x 29	18	2000
6520110	29 x 49 x 29	18	2000
6520200	29 x 74 x 29	43	2000
6520210	29 x 74 x 29	43	2000