


Walraven Britclips® Beam Clip / Threaded Rod Hanger

(J05165)

for flange

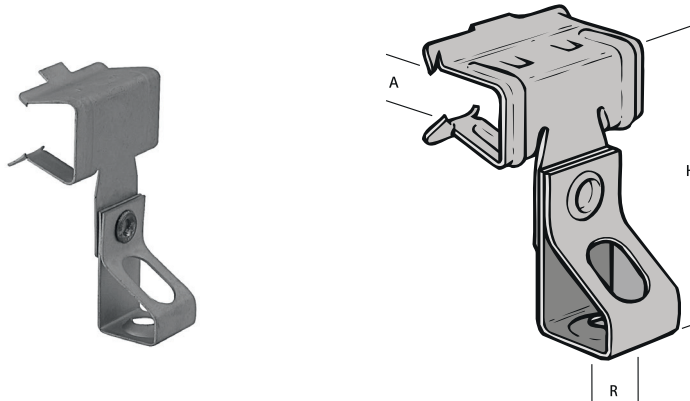

Features & benefits

- for a solid fixing to steel construction without the need for welding or drilling
- with threaded rod holder (rod height adjustable by screwing)
- material: spring steel (type CS70)
- surface treatment: Delta-Tone 9000 (480 hours)

Product Number	Type	Flange	Thread Size	Thread Type	Total Width x Total Height x Total Depth	Maximum Allowed Load Faz
<i>Reference letter</i>		<i>Fl</i>	<i>TS</i>	<i>TT</i>	<i>W x H x Dt</i>	<i>Fa,z</i>
<i>Unit description</i>		<i>(mm)</i>			<i>(mm) x (mm) x (mm)</i>	<i>(N)</i>
EM50420609	FC8 ICTM6	4-8	M6	Metric	38 x 55 x 42	680
EM50420616	FC14 ICTM6	8-14	M6	Metric	38 x 61 x 42	680
EM50420804	FC4 ICTM8	2-4	M8	Metric	28.50 x 50 x 37	680
EM50420809	FC8 ICTM8	4-8	M8	Metric	38 x 55 x 42	680
EM50420816	FC14 ICTM8	8-14	M8	Metric	38 x 61 x 42	680
EM50420820	FC20 ICTM8	14-20	M8	Metric	38 x 69 x 45	680
EM50421004	FC4 ICTM10	2-4	M10	Metric	28.50 x 50 x 37	680
EM50421009	FC8 ICTM10	4-8	M10	Metric	38 x 61 x 45	680
EM50421016	FC14 ICTM10	8-14	M10	Metric	38 x 64 x 45	680