


Walraven Socket Head Bolt (BUP1000)

(K4554)

for threaded connections

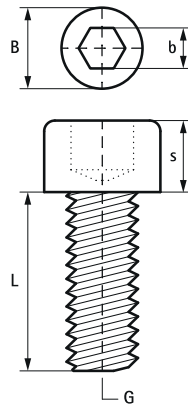

Features & benefits

- for tight space connections, like fixing in rail channels
- material: steel, strength class 8.8
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- according to DIN 912

Product Number	Screw Length	Thread Length	Thread Size	Head Shape	Nominal Head Height	Head Width	Key Driver Size	Total Width x Total Height x Total Length
Reference letter	Is	TL	TS		HH,n	HW	Drive	W x H x L
Unit description	(mm)	(mm)			(mm)	(mm)		(mm) x (mm) x (mm)
61380825	25	21.25	M8	Cylindrical Head	8	13	H6	13 x 33 x 13
61380860	60	28	M8	Cylindrical Head	8	13	H6	13 x 68 x 13
61380880	80	28	M8	Cylindrical Head	8	13	H6	13 x 88 x 13
61381025	25	20.50	M10	Cylindrical Head	10	16	H8	16 x 35 x 16
61381030	30	25.50	M10	Cylindrical Head	10	16	H8	16 x 40 x 16
61381230	30	25.50	M12	Cylindrical Head	12	18	H10	18 x 42 x 18
61381260	60	36	M12	Cylindrical Head	12	18	H10	18 x 72 x 18