


Walraven Bifix® 1301 Stainless Steel (M8)

(M0505)

for stainless steel and plastic pipes

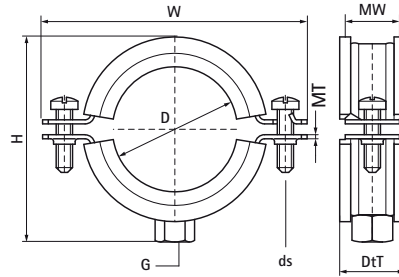

Features & benefits

- two-screw clamp
- with quick locking system
- material: stainless steel 1.4404 (AISI 316L)
- noise insulating lining, EPDM rubber, black
- age resistant lining
- sound insulating lining according DIN 4109



Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Width x Total Height x Total Depth	Material Width x Material Thickness	Screw Size	Approvals	Maximum Allowed Load Faz
Reference letter	D	D	D	G	W x H x DtT	MW x MT	ds		F _{0,z}
Unit description	mm		"		mm x mm x mm	mm x mm			N
3117015	11 - 14	DN 8	1/4	M8	58 x 33 x 25	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT)	900
3117018	15 - 19	DN 10	3/8	M8	62 x 37 x 25	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT)	900
3117023	20 - 23	DN 15	1/2	M8	64 x 41 x 25	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT)	900
3117029	25 - 28	DN 20	3/4	M8	70 x 47 x 25	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT)	900
3117035	31 - 35	DN 25	1	M8	78 x 54 x 25	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT)	900
3117043	40 - 43	DN 32	1 1/4	M8	85 x 61 x 25	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT)	900
3117049	47 - 51	DN 40	1 1/2	M8	97 x 70 x 25	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT)	900
3117056	52 - 56	-	-	M8	97 x 75 x 25	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT)	900
3117063	57 - 64	DN 50	2	M8	102 x 80 x 25	20 x 1.25	M6	RAL-GZ 655/B ITB (KOT)	900
3117067	64 - 67	-	-	M8	109 x 87 x 25	20 x 2	M6	RAL-GZ 655/B ITB (KOT)	1,350
3117076	70 - 76	DN 65	2 1/2	M8	118 x 96 x 25	20 x 2	M6	RAL-GZ 655/B ITB (KOT)	1,350
3117091	86 - 91	DN 80	3	M8	130 x 108 x 25	20 x 2	M6	RAL-GZ 655/B ITB (KOT)	1,350
3117106	100 - 106	-	-	M8	154 x 132 x 25	20 x 2.5	M6	RAL-GZ 655/B ITB (KOT)	1,350
3117116	108 - 116	DN 100	4	M8	158 x 136 x 25	20 x 2.5	M6	RAL-GZ 655/B ITB (KOT)	1,710