


Walraven Clamp HD1701 SSSt A4 EPDM M10

(M0530)

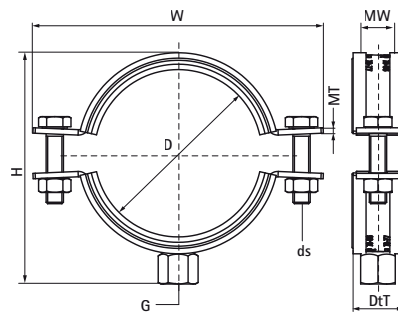

Features & benefits

- two-part clamp with two locking bolts
- heavy design
- with CO2 welded connection nut
- material: stainless steel 1.4404 (2B) - EN 10088, AISI 316L
- noise insulating lining, EPDM rubber, black
- with sound insulating lining (acc. DIN 4109), age resistant, for temperatures -30 °C up to +110 °C

Product Number	Outside Pipe Diameter	DN	Connection Thread	Total Width x Total Height x Total Depth	Material Width x Material Thickness	Screw Size	Maximum Allowed Load Faz
Reference letter	D	D	G	W x H x DtT	MW x MT	ds	F _{0,z}
Unit description	mm			mm x mm x mm	mm x mm		N
33174077	70 - 77	DN 65	M10	135 x 106 x 24	20 x 2.5	M8	1,250
33174086	78 - 86		M10	144 x 115 x 24	20 x 2.5	M8	1,250
33174095	87 - 95	DN 80	M10	153 x 125 x 24	20 x 2.5	M8	1,250
33174109	101 - 109		M10	166 x 139 x 31	25 x 2.5	M8	2,000
33174117	110 - 117	DN 100	M10	174 x 147 x 31	25 x 2.5	M8	2,000
33174129	122 - 129		M10	186 x 159 x 31	25 x 2.5	M8	2,000
33174137	130 - 137		M10	194 x 167 x 31	25 x 2.5	M8	2,000
33174145	138 - 145	DN 125	M10	204 x 177 x 31	25 x 2.5	M8	2,000
33174154	146 - 154		M10	215 x 185 x 36	30 x 3	M8	3,300
33174162	155 - 162		M10	223 x 193 x 36	30 x 3	M8	3,300
33174170	163 - 170	DN 150	M10	231 x 201 x 36	30 x 3	M8	3,300
33174178	171 - 178		M10	239 x 209 x 36	30 x 3	M8	3,300
33174186	179 - 186		M10	248 x 218 x 36	30 x 3	M8	3,300
33174195	187 - 195		M10	256 x 226 x 36	30 x 3	M8	3,300
33174203	196 - 203		M10	264 x 234 x 36	30 x 3	M8	3,300